OLEO1B BELT

TRACK SERIES

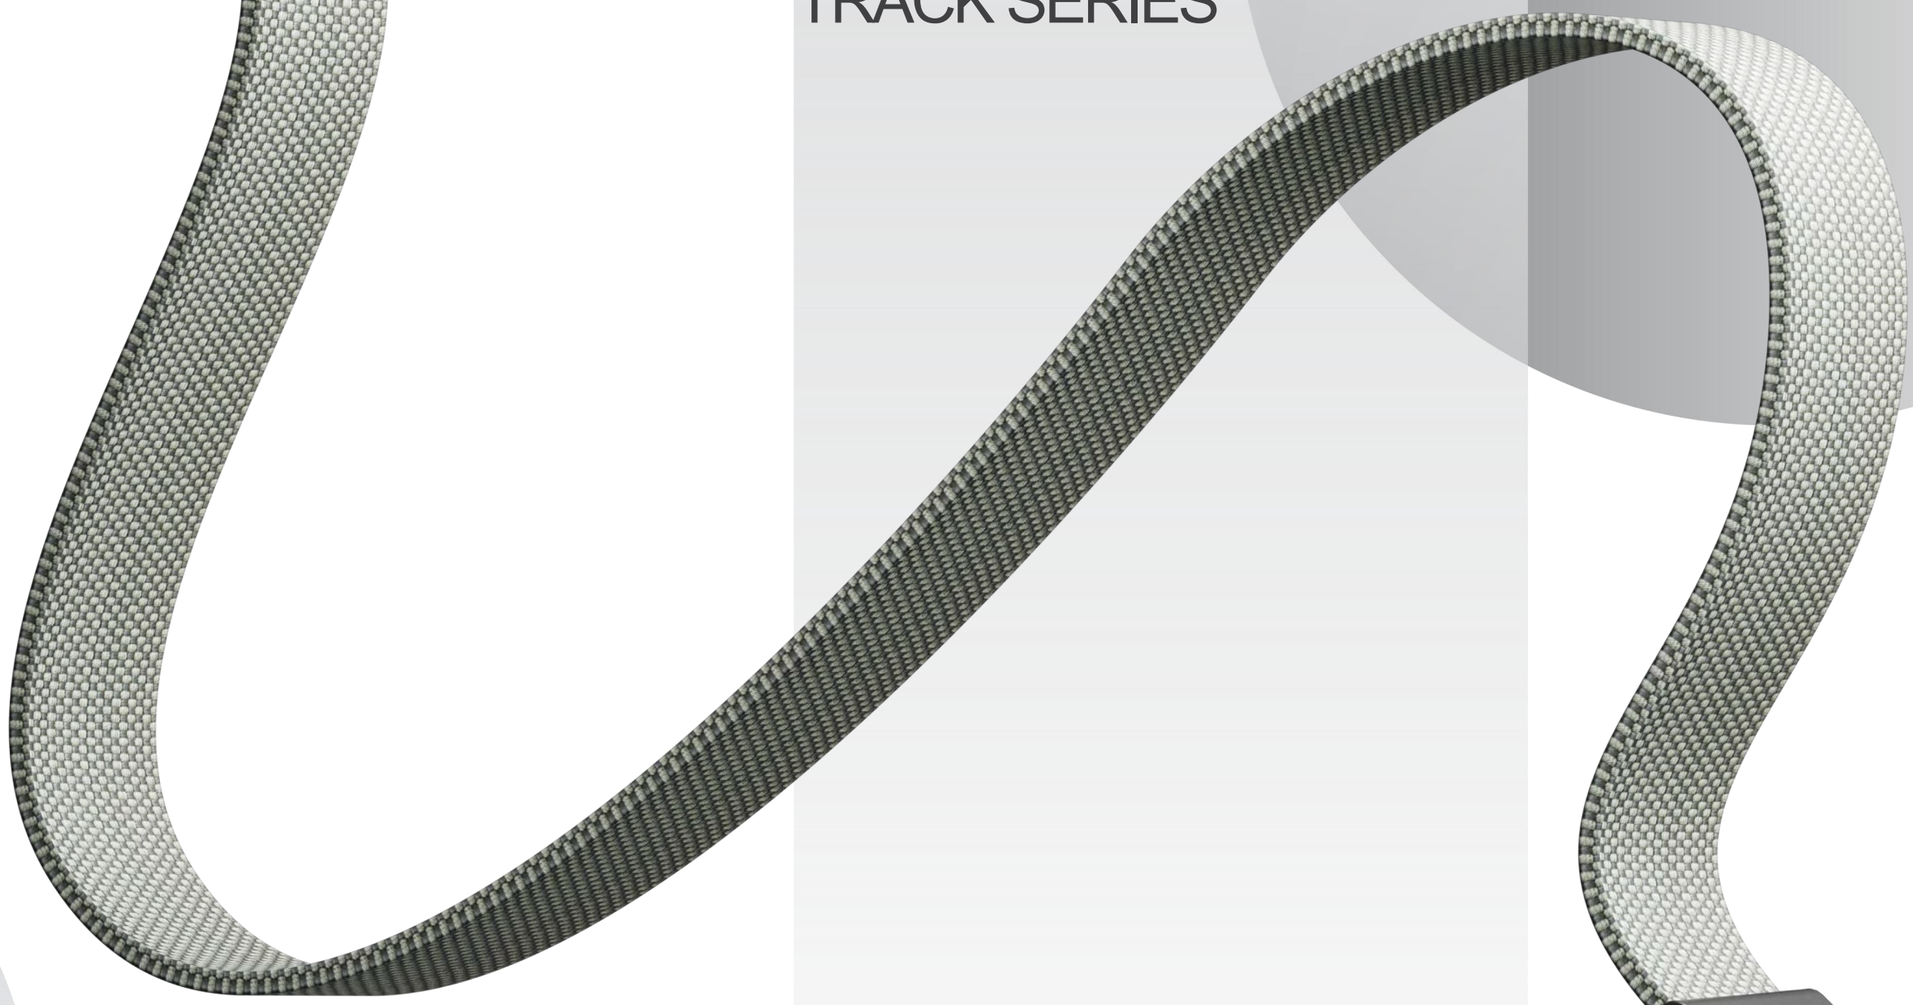

OLEDER LIGHTING CO.,LTD

Tel：0086-20-37716973

Cell：0086-15920570517

Email：r.oyoung@oleder-lighting.com

oleever@oleder-lighting.com

Web: www.oleder-lighting.com

Add: Room 335,Building 2, #1 Xianke 1st Rd, Honglitronic Group,Huadu ,510890,Guangzhou,P.R.C.

tuya DIMMABLE LVD CE LM79 LM80 RoHS

OLEDER

OLEO1B BELT TRACK SERIES

VERSATILE LIGHTING SYSTEM

Taking the concept of the light rail to a new level.
It allows free placement of the luminaires and the creation of unique lighting solutions .

Simple and progressive, merges the design of a belt with a groundbreaking lighting concept. Featuring a textural, fabric belt that conducts electricity, it enables light to flow in space.

POWER SUPPLY INSTALLATION DEMONSTRATION

The belt flows in and out of the canopy, establishing conductivity and electrical connection where needed

FIXED CYLINDER AND FIXED RING-RECESSED INSTALLATION DEMONSTRATION

cylinder bracket fix on the ceiling to hold the belt or as a feeder,recessed ring fixed on the ceiling to hold the belt or as a feeder.

MULTIPLE COLORS AVAILABLE

There are five colors to choose from for the belt: Brick red,dark blue,beige, light green,black. According to the different application, create your own unique style



CONNECTION BETWEEN THE TRACK AND THE BELT

connector for ultrathin track and belt to conduct the electricity,The belt adapter can be rotated horizontally 355°

HOME DECORATION SCENE

Suitable for home decoration scenarios such as living room, study, and dining table at home.

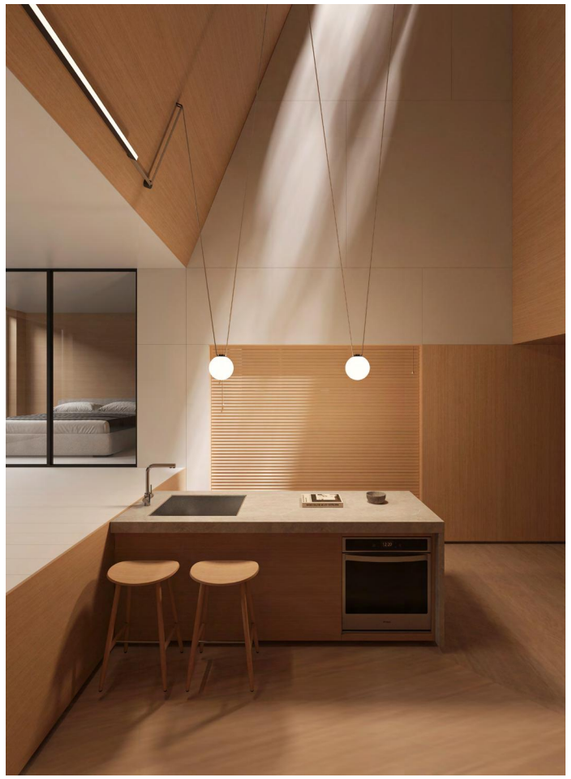

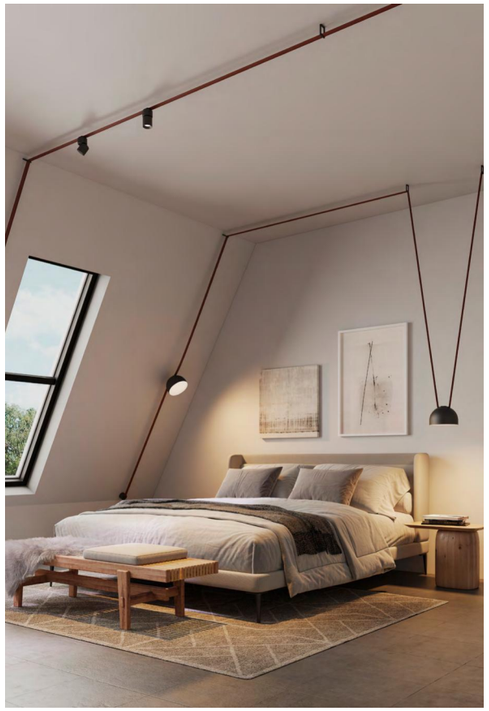

Both object of beauty and high-performance lighting toolkit,offers personalised atmospheres while doubling as striking visual sculpture.

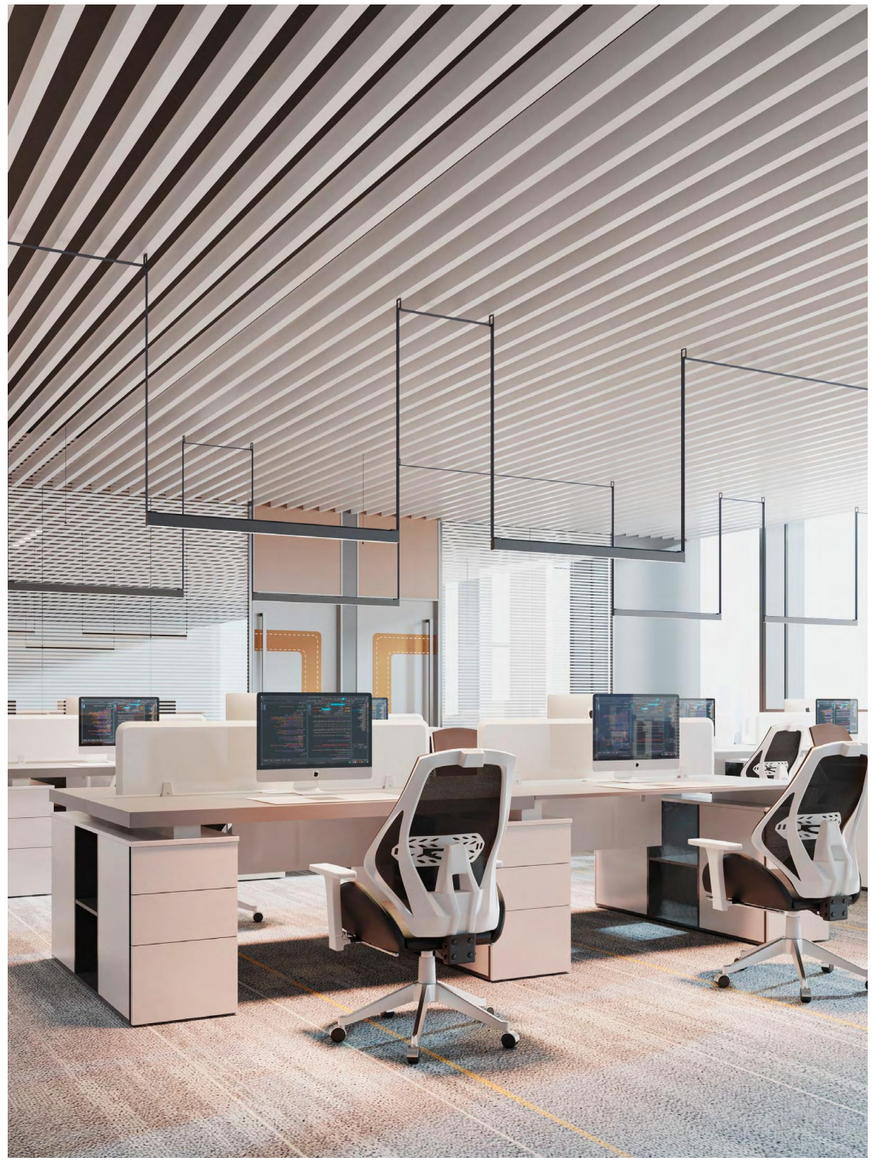

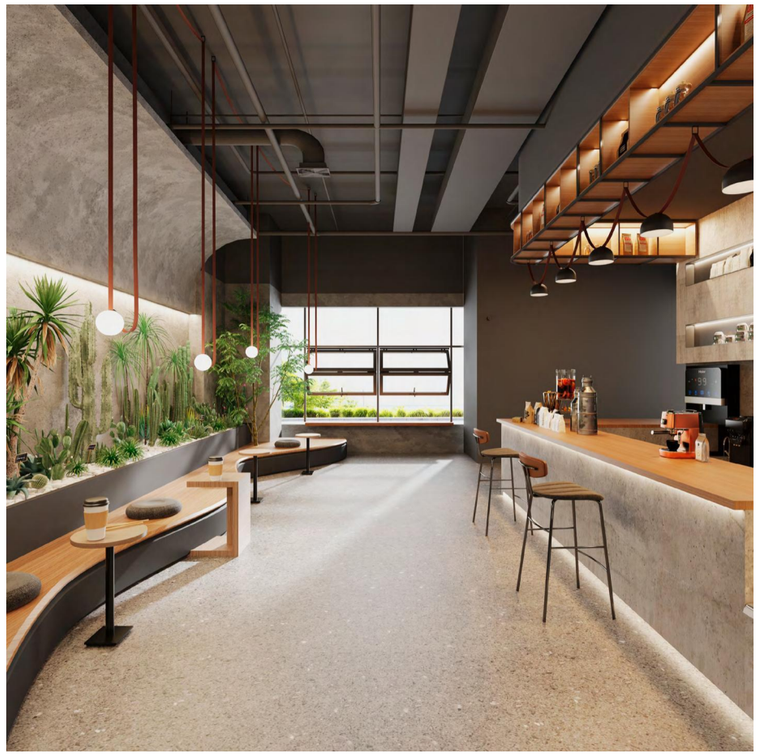

WORKWEAR SCENARIO

Suitable for workwear scenarios such as restaurants, bars, and front desk.

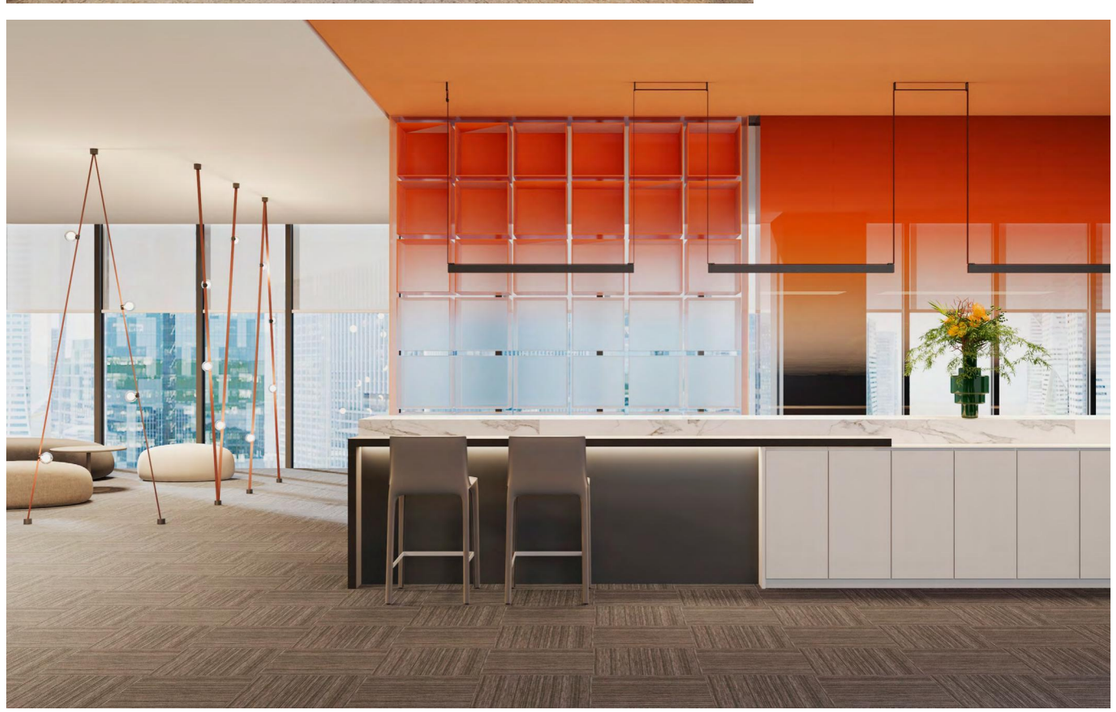

A VARIETY OF MODELING LINE DRAWINGS

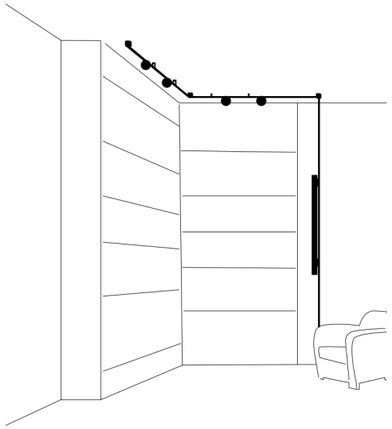

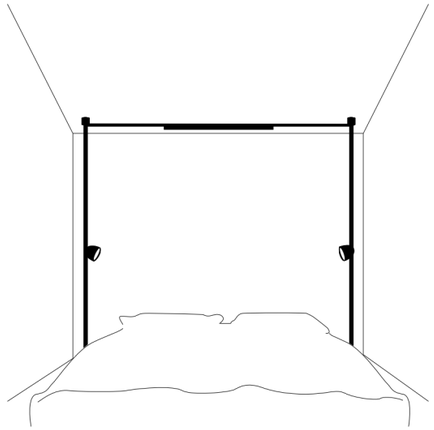

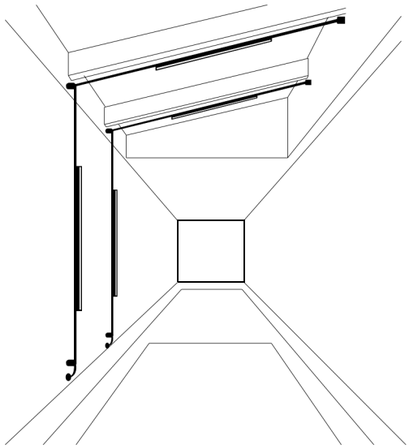

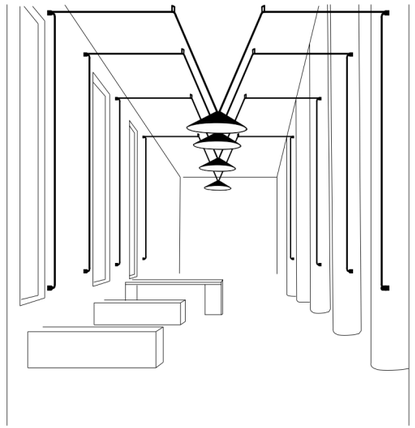

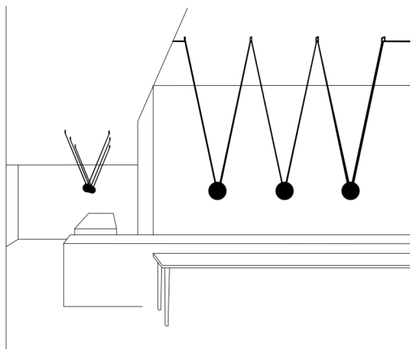

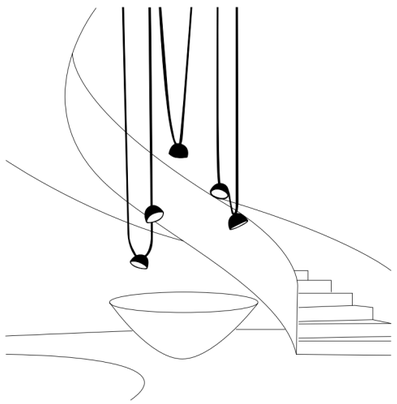

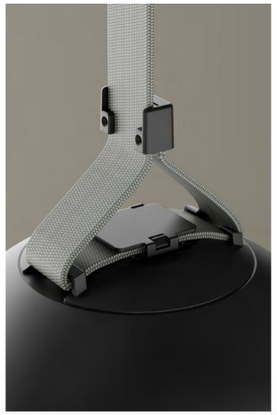

EASY CONNECTION

Each belt, which can be cut as needed, accommodates multiple luminaires and operates with simple plug-in technology for unparalleled ease of installation and connection. The belt offers adjustments in tension from taut to relaxed as well as click-and-connect functionality, snapping into a buckle attached to each luminaire

THERE ARE THREE WAYS TO CONNECT THE POWER SUPPLY

CONDUCTIVE MODULE

Model NO.	OLEO1B-10M / 20M / 30M
Product Name	BELT
Material	Copper & Fabric (Terylene)
Size	28.5*2.8mm
Description	Voltage DC48V Copper Size:1.36mm²*2 Flexible cutting 10meters/Roll 20meters/Roll 30meters/Roll

Model NO.	OLEO1B-AD1
Product Name	Adapter
Material	PC
Size	38.5*36*10.5mm
Description	transform the lights in ultrathin series to fix proper on the belt

Model NO.	OLEO1B-AD2
Product Name	Adapter
Material	PC
Size	44*33*30mm
Description	connector for ultrathin track and belt to conduct the electricity

Dimensions(mm)

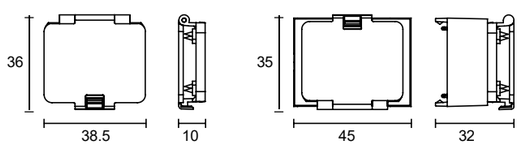

Model NO.	OLEO1B-F01
Product Name	Fixed Bracket
Material	PC
Size	50*36.5*7mm
Description	bracket fix on the ceiling to hold the belt

Model NO.	OLEO1B-F02
Product Name	Fixed Cylinder
Material	PC
Size	Φ65*45mm
Description	cylinder bracket fix on the ceiling to hold the belt or as a feeder

Dimensions(mm)





Model NO.	OLEO1B-CAP1
Product Name	End cap
Material	PC
Size	32*10*7.5mm
Description	end cap for single belt

Model NO.	OLEO1B-CAP2
Product Name	End cap
Material	PC
Size	34*18*11mm
Description	end cap for double belt

Dimensions(mm)





Model NO.	OLEO1B-F03
Product Name	Fixed Ring-Recessed
Material	PC
Size	Φ86*40mm
Description	recessed ring fixed on the ceiling to hold the belt or as a feeder; Cut out size:Φ75mm

Model NO.	OLEO1B-SP100 / OLEO1B-SP200
Product Name	Power Supply
Material	PC
Size	250*90*45mm
Description	Power:100w/200w Input Voltage:220Vac Output Voltage:DC48V Current:2.1A/4.2A

Dimensions(mm)



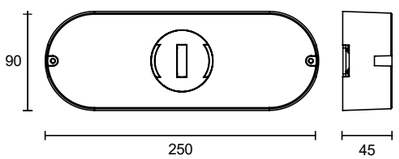

PRODUCT INFORMATION

Model NO.	OLEO1B-HB200	OLEO1B-HB150	OLEO1B-G100
Power	7W	7W	4W
CCT	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V	DC48V
CRI	>90	>90	>90
Beam Angle	120°	120°	120°
Material	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass
Color	Black	Black	Black
Life	30 000H	30 000H	30 000H
Warranty	3 Years	3 Years	3 Years

Dimensions(mm)







Model NO.	OLEO1B-HR200	OLEO1B-HT600
Power	12W	20W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	120°	120°
Material	Aluminum	Aluminum
Color	Black	Black
Life	30 000H	30 000H
Warranty	3 Years	3 Years

Dimensions(mm)



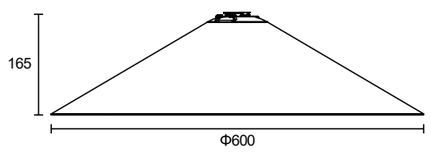

Model NO.	OLEO1B-LB10	OLEO1B-LB15
Power	20W	30W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	30°	30°
Material	Aluminum	Aluminum
Color	Black	Black
Life	30 000H	30 000H
Warranty	3 Years	3 Years

Dimensions(mm)





Model NO.	OLEO1B-DF265	OLEO1B-DF530
Power	12W	24W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	105°	105°
Material	Aluminum	Aluminum
Color	Black	Black
Life	30 000H	30 000H
Warranty	3 Years	3 Years

Dimensions(mm)





www.oleder-lighting.com

www.oleder-lighting.com

@olderlighting Instagram