CHANDELIER-TRACK

OLE04 SERIES

OLEDER LIGHTING CO.,LIMITED

Tel：86-20-37716973

Cell：0086-15920570517

Email：oleever@oleder-lighting.com

r.oyoung@oleder-lighting.com

Web: www.oleder-lighting.com

Add.: Room 335,Building 2, #1 Xianke 1st Rd, Honglitronic Group,Huadu ,510890,Guangzhou,P.R.C.

tuya DIMMABLE LVD CE LM79 LM80 RoHS

OLEDER

CHANDELIER-TRACK
OLEO4 SERIES

DC48V SYSTEM

The low voltage track system can easily applied to match with down lights, spotlights, linear lights and decorative lights, Offers flexibility and freedoms for variable lamps and design. Suitable for whole space lighting or accent lighting and decorative lighting all can apply in a handy way.

STRAIGHT TRACKS

The straight track has single-layer and double-layer track designs, and there are different sizes for you to choose from. There are three different power installation methods:On-track,External and Embedded.

You can bridge and move tracks between tracks according to your needs, providing flexible design for large-span space lighting.

Length of the Pole:
300mm+300mm/500mm+500mm/750mm+750 mm/1000mm+1000mm

POWER INSTALLATION METHOD

Power Supply On-Track

External Power Supply

Embedded Power Supply

CIRCULAR ARC TRACKS

There are various diameter specifications available for the circular arc track: Φ600mm/ Φ800mm/Φ1000mm/Φ1500mm/Φ2000mm.

It is suitable for different types of ceilings, creating a spacious and fashionable space, and can create more different shapes according to your needs.the diameter and the circular, square or rectangular shape.

POWER INSTALLATION METHOD

The OLEO4-PL200 product can be freely transferred

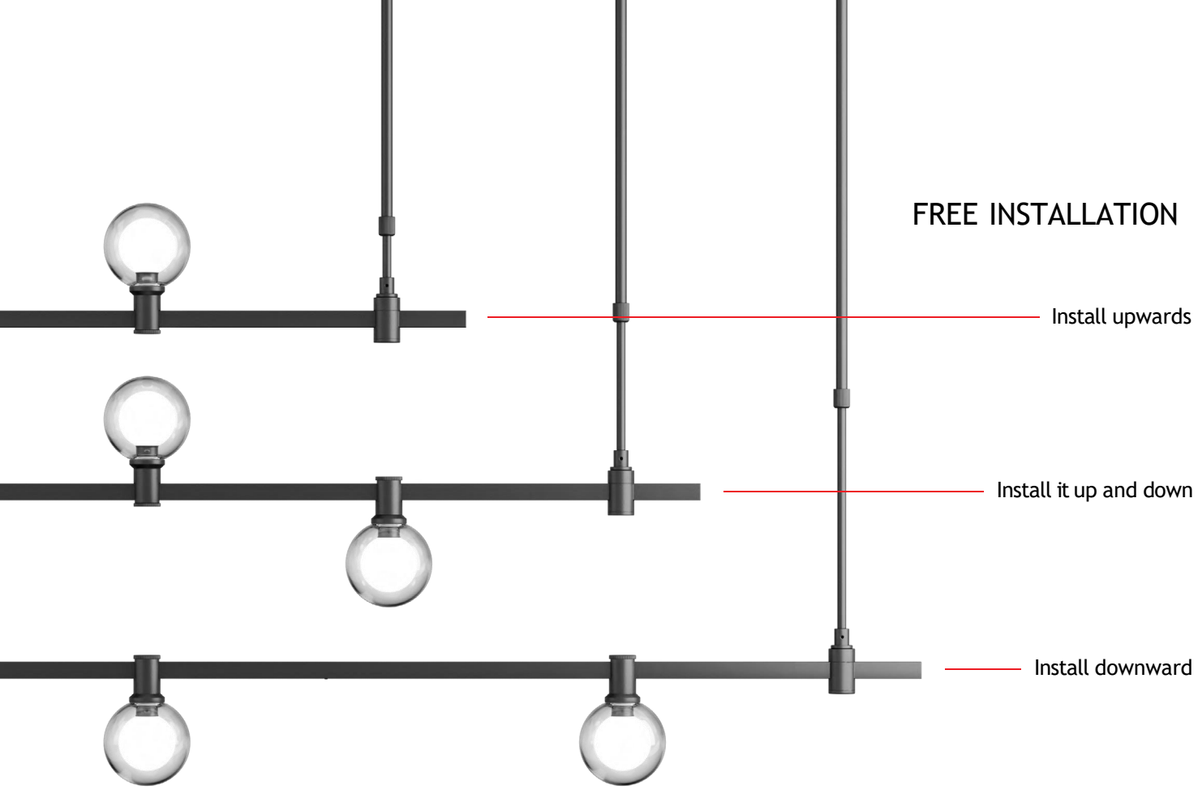

FREE INSTALLATION

QUICK INSTALLATION

Rotating buckle, with magnets on the lamp joint to prevent the lamp from falling off easily, making it safer and more reliable.

48V low voltage power supply with safety performance, can be directly touched, or easily slide into any position on the track according to the different needs of space

MULTIPLE COLORS AVAILABLE

There are three colors to choose from for the track: black, gold, and nickel. According to the different needs of the space, match them to create your own unique style

WORKWEAR SCENE

Suitable for workwear scene such as restaurants, bars, and front desk.

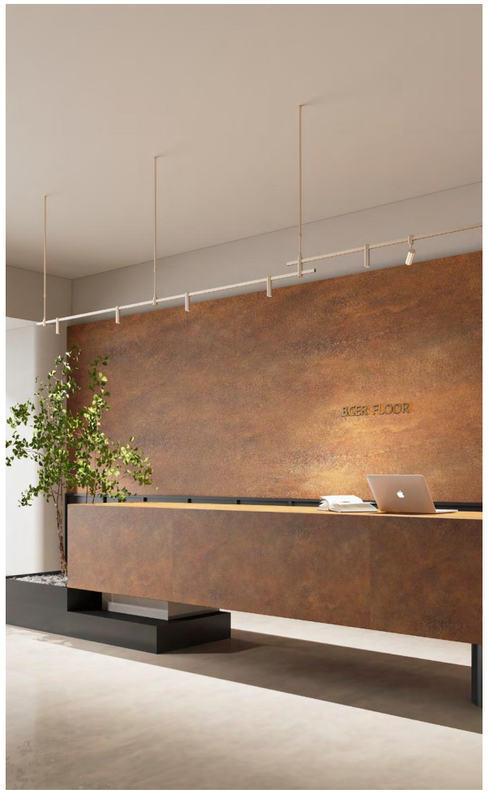

HOME DECORATION SCENE

Suitable for home decoration scene such as living room, study, and dining table at home.

STRAIGHT TRACK



Model NO.	OLEO4-Track<u>X</u>
Material	Aluminum+Copper+Iron
Color	Black/Golden
Length	1000mm/2000mm/2500mm



*<u>X</u>=Length Of The Track

Model NO.	OLEO4-ZJ1	OLEO4-ED1
Material	Copper+PC	PC
Color	Black/Golden	Black/Golden
Function	Connector	End Cap

ACCESSORIES

Single-layer tracks

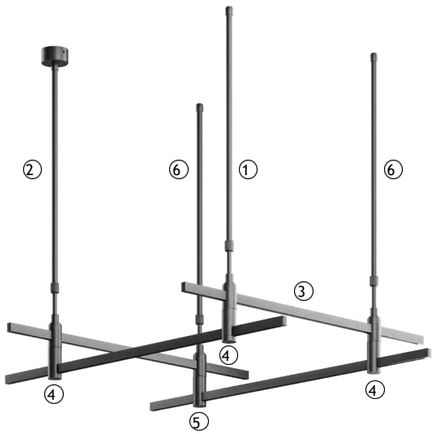

Double-decker tracks

Model NO.	OLEO4-HD<u>XXX</u>	OLEO4-FD<u>XXX</u>
illustrate	Holder With Suspender	Feeder With Suspender and Cable

Model NO.	OLEO4-Track	OLEO4-FD2
illustrate	/	Double Layer 360° Connector <u>With Conductor</u>

Model NO.	OLEO4-HD2	OLEO4-CD<u>XXX</u>
illustrate	Double Layer 360° Holder <u>Without</u>	Connector With Suspender <u>Without Cable</u>

*<u>XXX</u>=Length Of The Pole:300mm+300mm/500mm+500mm
750mm+750mm/1000mm+1000mm

ARC TRACK

Model NO.	OLEO4-Track-R<u>X</u>	OLEO4-Track-XR<u>X</u>
Material	Aluminum+Copper+Iron	Aluminum+Copper+Iron
Color	Black/Golden	Black/Golden
Dimension	Φ600mm/Φ800mm/Φ1000mm	Φ1500mm/Φ2000mm

*<u>X</u>=Diameter Of The Circle

POWER SUPPLY

External Power Supply

Power Supply On-Track

	External Power Supply	Power Supply On-Track
	Model NO. OLEO4-SP100/EX OLEO4-SP200/EX	Model NO. OLEO4-SP100/OT OLEO4-SP200/OT
Model NO.	OLEO4-SP100/EX OLEO4-SP100/EX	OLEO4-SP200/OT OLEO4-SP200/OT
Rated Power	100W	200W
Dimension	L260xW22xH25m	L280xW22xH25mm
Input voltage	m AC180~255V	AC180~255V
Working voltage	DC48V	DC48V
Operating Current	Max.2100mA	Max.4200mA
Frequency	50/60Hz	50/60Hz
Power factor	≥0.4	≥0.4
Driver efficiency	＞80%	＞80%
Dimmable	No dimming	No dimming
Life Time IP	≥30000hrs	≥30000hrs
Grade	IP20	IP20
Protection	Over current protection-OCP 2.7A Thermal protection-OHP（＞150 ℃） Surge protection-OVP （AC2000V 10s） Flickers free	Over current protection-OCP 2.7A Thermal protection-OHP（＞150 ℃） Surge protection-OVP （AC2000V 10s） Flickers free
Working Temperature	Form -10°C to 40°C	Form -10°C to 40°C
Body Material	Aluminum	Aluminum

PRODUCT INFORMATION

Model NO.	OLEO4-D30	OLEO4-D40	OLEO4-D50
Power	7W	12W	18W
CCT	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V	DC48V
CRI	>90	>90	>90
Beam Angle	15°/24°/36°/60°	15°/24°/36°/60°	15°/24°/36°/60°
Material	Aluminum	Aluminum	Aluminum
Color	Black/Golden	Black/Golden	Black/Golden
Life	30 000H	30 000H	30 000H
Warranty	3 Years	3 Years	3 Years

Dimensions(mm)

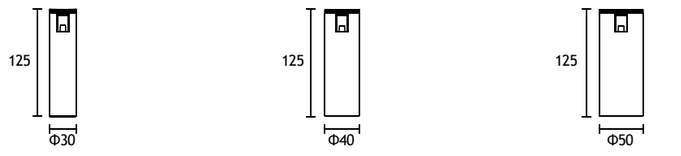

Model NO.	OLEO4-D30A	OLEO4-D40A	OLEO4-D50A
Power	4W	7W	12W
CCT	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V	DC48V
CRI	>90	>90	>90
Beam Angle	90°	90°	90°
Material	Acrtlic	Acrtlic	Acrtlic
Color	Black/Golden	Black/Golden	Black/Golden
Life	30 000H	30 000H	30 000H
Warranty	3 Years	3 Years	3 Years

Dimensions(mm)

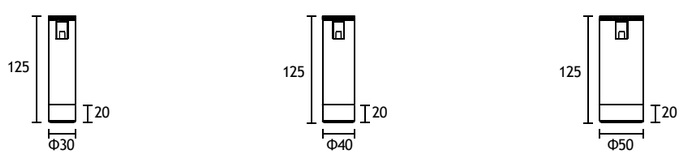

Model NO.	OLEO4-TL7	OLEO4-TL12
Power	7W	12W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	15°/24°/36°/60°	15°/24°/36°/60°
Material	Aluminum	Aluminum
Color	Black/Golden	Black/Golden
Life	30 000H	30 000H
Warranty	3 Years	3 Years

Dimensions(mm)

Model NO.	OLEO4-X60	OLEO4-X80
Power	12W	18W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	15°/24°/36°/60°	15°/24°/36°/60°
Material	Aluminum	Aluminum
Color	Black/Golden	Black/Golden
Life	30 000H	30 000H
Warranty	3 Years	3 Years

Dimensions(mm)

PRODUCT INFORMATION

Model NO.	OLEO4-LB5	OLEO4-LB10
Power	10W	20W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	30°	30°
Material	Aluminum	Aluminum
Color	Black/Golden	Black/Golden
Life	30 000H	30 000H
Warranty	3 Years	3 Years

Dimensions(mm)





Model NO.	OLEO4-DF265	OLEO4-DF530
Power	12W	24W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	105°	105°
Material	Aluminum	Aluminum
Color	Black/Golden 30	Black/Golden
Life	000H	30 000H
Warranty	3 Years	3 Years

Dimensions(mm)





Model NO.	OLEO4-G100	OLEO4-R70
Power	4W	4W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	160°	160°
Material	Aluminum+Glass	Aluminum+Arclic
Color	Black/Golden	Black/Golden
Life	30 000H	30 000H
Warranty	3 Years	3 Years

Dimensions(mm)





Model NO.	OLEO4-PL200
Power	15W
CCT	3000K/4000K/5000K
Voltage	DC48V
CRI	>90
Beam Angle	105°
Material	Aluminum+PC+Arclic
Color	Black/Golden
Life	30 000H
Warranty	3 Years

Dimensions(mm)



www.oleder-lighting.com

@olderlighting Instagram